Features

1 or 2 Pole electromechanical step relay, for electrically common coil and contact circuits

27.0x - Connect up to 24 illuminated push buttons with the addition of module 027.00

27.2x - Connect up to 15 illuminated push buttons (without additional module) - incorporates coil power limiter to permit continuous coil energisation

- Choice of 3 switching sequences
- Screw terminal connections
- AC coil
- Panel mount
- Cadmium free contact material
- Italian Patent

27.0x / 2x
Screw terminal

27.0x	27.2x EVO
• Single or 2 double phase switch 1 NO (SPST-NO) or 2 NO (DPST-NO)	• Single or 2 double phase switch 1 NO (SPST-NO) or 2 NO (DPST-NO) with coil power limiter
27.01  	27.21
27.05 - 27.06  	27.25 - 27.26 

For outline drawing see page 3

Contact specification				
Number of contacts		1 or 2		1 or 2
Rated current/Maximum peak current	A	10/20		10/20
Rated voltage/Maximum switching voltage	V AC	110/—	230/—	230/—
Rated load AC1	VA	1100	2300	2300
Rated load AC15	VA	250	500	500
Nominal lamp rating: 230V incandescent/halogen	W	—	1000	1000
fluorescent tubes with electronic ballast	W	200	400	400
fluorescent tubes with electromechanical ballast	W	180	360	360
CFL	W	100	200	200
230V LED	W	—	200	200
LV halogen or LED with electronic ballast	W	100	200	200
LV halogen or LED with electromechanical ballast	W	200	400	400
Minimum switching current	mW (V/mA)	10		10
Standard contact material		AgNi		AgNi
Coil specification				
Nominal voltage (U_N)	V AC (50/60 Hz)	110	230	230
	V DC	—		—
Pickup/continuous power	VA (50 Hz)	4/4		25/1
Operating range	AC 50Hz/AC 60Hz	(0.8 ... 1.1)U_N/(0.85 ... 1.1)U_N		(0.8 ... 1.1)U_N/(0.85 ... 1.1)U_N
	DC	—		—
Technical data				
Mechanical life AC/DC	cycles	$300 \cdot 10^3$		$300 \cdot 10^3$
Electrical life at rated load in AC1	cycles	$100 \cdot 10^3$		$100 \cdot 10^3$
Max no. of illuminated push-button	(≤1mA)	4 (24 with module 027.00)		15
Minimum/Maximum impulse duration		0.1s/1h (according to EN 60669)		0.1s/continuous
Ambient temperature range	°C	–40...+40		–40...+40
Protection category		IP 20		IP 20
Approvals (according to type)				

K

Ordering information

Example: 27 series screw terminal, panel mount step relay, single phase switch 1 NO (SPST-NO) 10 A contact, coil rated 230 V AC.

2 7	.	0	1	.	8	.	2 3 0	.	0	0	0	0

Series

Type
0 = Clamp terminal
2 = Clamp terminal, with coil power limiter

No. of poles
1 = Single phase switch 1 NO (SPST-NO)
5 = 4 sequences double phase switch 2 NO (DPST-NO)
6 = 3 sequences double phase switch 2 NO (DPST-NO)

Coil voltage
See coil specifications

Coil version
8 = AC (50/60 Hz)

Technical data

Other data		27.01, 27.21		27.05, 27.06, 27.25, 27.26	
Power lost to the environment with rated current and coil de-energised	W	0.9		1.8	
Screw torque	Nm	0.8		0.8	
Max. wire size		solid cable	stranded cable	solid cable	stranded cable
	mm^2	2x2.5	1x4 / 2x2.5	2x2.5	1x4 / 2x2.5
	AWG	2x14	1x12 / 2x14	2x14	1x12 / 2x14

Coil specifications

Types 27.01, 27.05, 27.06

Nominal voltage U_N	Coil code	Operating range (50 Hz) U_{min}	U_{max}	Resistance R	Consumption I at U_N (50 Hz)
V		V	V	Ω	mA
110	**8**.110	88	121	1,400	42.0
230	**8**.230	184	253	6,500	17.5

Types 27.21, 27.25, 27.26

Nominal voltage U_N	Coil code	Operating range (50 Hz) U_{min}	U_{max}	Resistance R	Consumption pick up I at U_N (50 Hz)	Consumption continuous I at U_N (50 Hz)
V		V	V	Ω	mA	mA
230	**8**.230	184	253	1,250	100	4

Type	Number of steps	Sequence 1	2	3	4
27.01/21	2				
27.05/25	4				
27.06/26	3				

Wiring diagram

Type 27.01/05/06

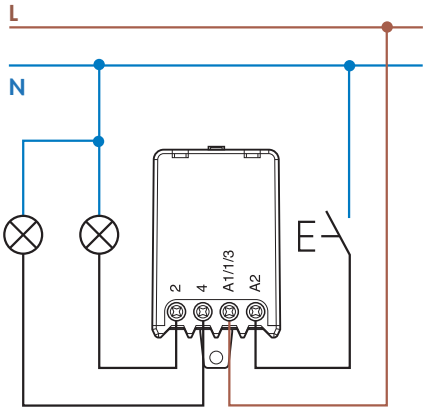

Type 27.21/25/26

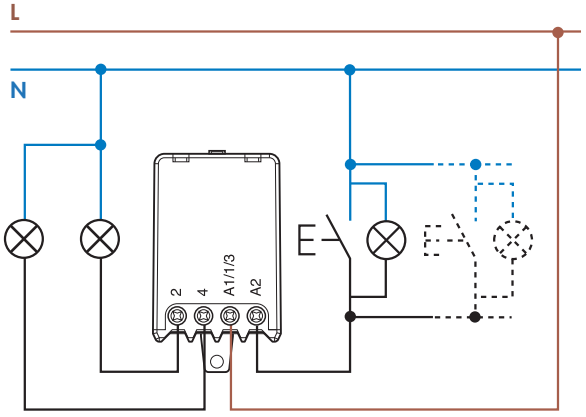

IV-2015, www.findernet.com

Accessories for types 27.01, 27.05, 27.06

Module for illuminated push-button (230 V AC applications)



Type 027.00
This module is necessary if using up to a maximum of 24 illuminated push-buttons (1 mA max, 230 V AC) in the switching input circuit. It must be plugged directly into the relay.



Type 27.0x + 027.00

Outline drawings

27.0x / 2x
Screw terminal



K